


Integral Laminated Folding Solar Charger


**Cell Efficiency rate:
25.8%**

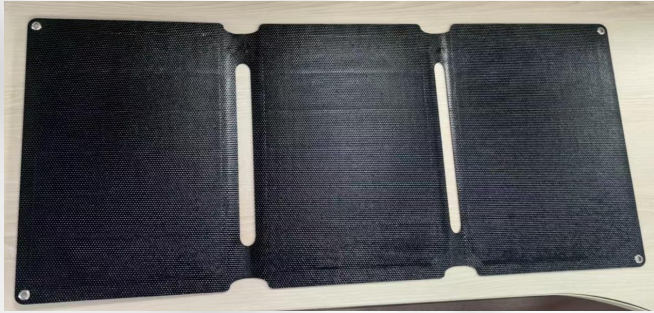

- **30W Integral Laminated Folding Plate**
- **DA72-30W3P**


- Maximum power at STC(P_{max}):30W
- Optimum Operating Voltage(V_{mp}):6V
- Optimum Operating Current(I_{mp}):5A
- Open-Circuit Voltage(V_{oc}):7.2V
- Short-Circuit Current(I_{sc}):4.1A
- Operating Temperature:-40 °C to +85 °C
- Maximum System Voltage: 1000Vdc(IEC)/600Vdc(UL)
Unfolded Size: 290*660*2.5mm
Folded Size: 290*220*2.5mm
Package size: 320*270*50mm
Net weight:0.55kg(32 sets per box, large box
size:570*470*335mm)
Gross weight:0.68kg
Cell Type:Monocrystalline
Cell Efficiency rate:25.8%
- Power Tolerance:+3%
- Junction Box:Ip65 rated
Loading(20'/40'/40HQ):10150/19520/25380

Integral Laminated Folding Solar Charger

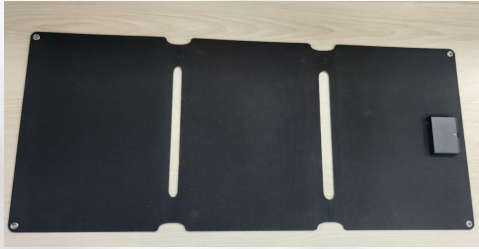

Integral Laminated Folding Solar Charger

**Cell Efficiency rate:
25.8%**

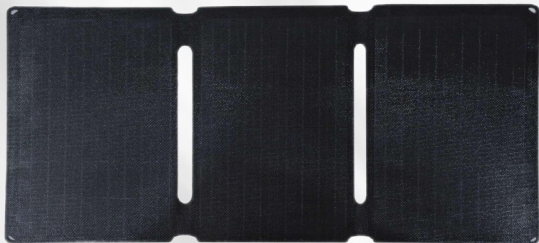

- **40W Integral Laminated Folding Plate**
- **DA72-40W3P**

- Maximum power at STC(P_{max}):40W
- Optimum Operating Voltage(V_{mp}):18V
- Optimum Operating Current(I_{mp}):2.22A
- Open-Circuit Voltage(V_{oc}):21.6V
- Short-Circuit Current(I_{sc}):2.35A
- Operating Temperature:-40 °C to +85 °C
- Maximum System Voltage: 1000Vdc(IEC)/600Vdc(UL)
- **Unfolded Size:** 820*370*2mm
- **Folded Size:** 280*370*25mm
- **Net weight:**1.2kg
- Cell Type:Monocrystalline
- Cell Efficiency rate:25.8%
- Power Tolerance:+3%
- Junction Box:Ip65 rated

Integral Laminated Folding Solar Charger

