


Metal Roofing Systems with High Efficiency Thin-Film Solar

MiaSolé FLEX series modules are the highest efficiency flexible thin solar modules on the market today.

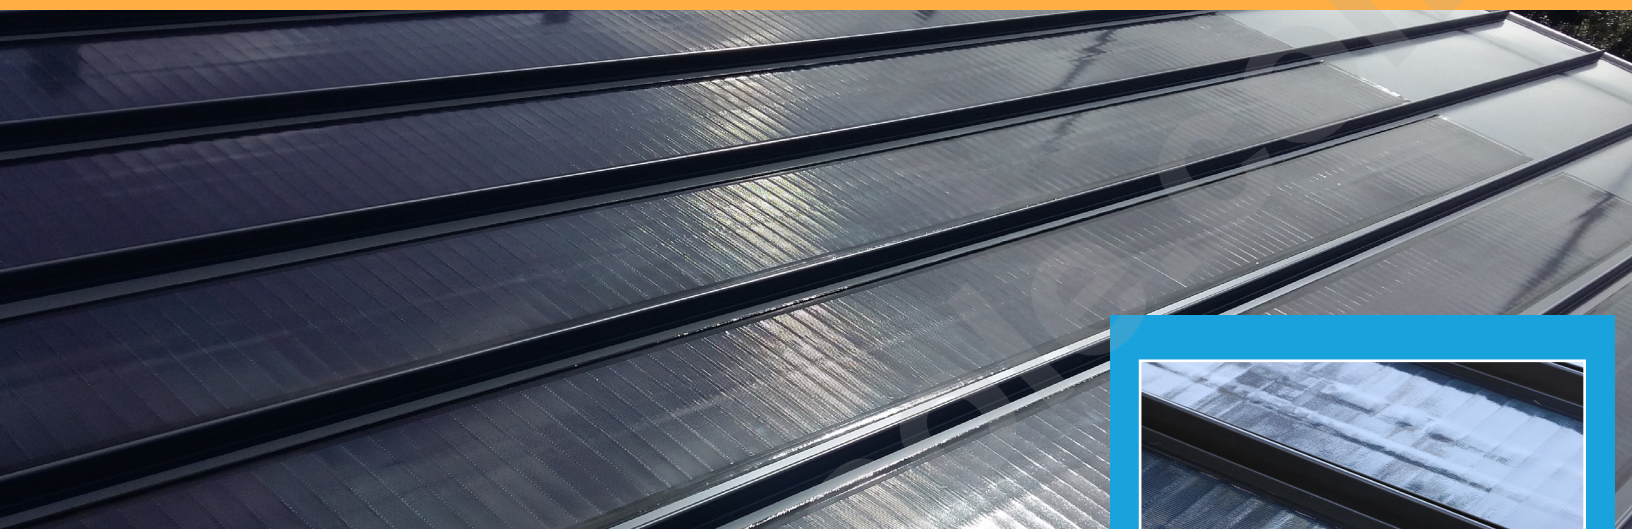

High Performance, Flexible, Lightweight Thin-film Solar

The MiaSolé FLEX series modules are the ideal solar solution for metal roofs. The modules are lightweight and can be directly bonded to the roof—eliminating racking, reducing weight load, and significantly lowering labor and project costs. MiaSolé FLEX modules can be installed over a wide range of standard architectural and specific exposed fastener metal roof panels. For example, the FLEX Series modules can be directly applied to industry-standard 7.2 trapezoid rib corrugated panels to create solar parking and RV canopies.

Features and Benefits

- Factory Applied Self-Adhesive—Simple Peel-and-Stick Application
- Operating Efficiency as High as 17.5%
- Lightweight—2.2 kg/m² (0.5 lb/ft²)
- Provides Four Times the Wattage per Kilogram as Silicon
- High Wind Zone Performance
- Lowest Rooftop Solar Installation Cost
- Optional: Factory-laminated on Metal Panels for Rapid Installation
- Optional: Field-applied Modules and On-site Roll Forming to Retrofit Existing Roofs



2590 Walsh Avenue, Santa Clara, California 95051, USA
1.408.919.5700 info@miasole.com www.miasole.com



Steep-slope Standing Seam



Residential Applications



Solar Parking Canopies

TECHNICAL INFORMATION

The MiaSolé FLEX module is a flexible polymer encapsulated thin-film solar module based on MiaSolé's advanced CIGS (Copper Indium Gallium Selenide) technology. The FLEX series modules are the solar industry's highest efficiency flexible CIGS thin-film solar modules on the market today.

Details	Specifications	
Product	FLEX-03N 2.6m	FLEX-03NL 5.9m
Length	2583 mm (101.7 in, 8ft 5.7in)	5905 mm (232.5 in, 19ft 4.7in)
Width	348 mm (13.7 in)	348 mm (13.7 in)
Module Thickness	2.5 mm (0.1 in)	2.5 mm (0.1 in)
Weight w/adhesive	2.3 kg (5.0 lb)	4.9 kg (10.8 lb)
Weight/Area	2.6 kg/m ² (0.5 lb/ft ²)	2.4 kg/m ² (0.5 lb/ft ²)
Junction Box Type	IP68	
Cable Connections	Helios H4 (S&F)	
Cell Type	Copper Indium Gallium Diselenide (CIGS)	
Warranty*	5 yr. workmanship, 10/25 yr. power output	
Certifications	UL 1703, IEC 61646, IEC 61730, IEC 61701 (Salt Spray)	

*Please see full warranty for details.

The MiaSolé flexible thin-film cell enables a number of product applications that standard silicon panels cannot offer.

- Integrated profile for aesthetic appeal
- Low installation cost
- Four times lighter than silicon solar panel solutions
- Superior resistance to wind



2590 Walsh Avenue, Santa Clara, California 95051, USA
1.408.919.5700 info@miasole.com www.miasole.com

HIGH
EFFICIENCY
LIGHTWEIGHT
FORM



FLEX-03N 2.6m

FLEX-03 115N	115 WATTS
FLEX-03 120N	120 WATTS
FLEX-03 125N	125 WATTS
FLEX-03 130N	130 WATTS
FLEX-03 135N	135 WATTS

FLEX-03NL 5.9m

FLEX-03 280NL	280 WATTS
FLEX-03 290NL	290 WATTS
FLEX-03 300NL	300 WATTS
FLEX-03 310NL	310 WATTS
FLEX-03 320NL	320 WATTS

Contact us:
info@miasole.com

MiaSolé and the MiaSolé logo are registered trademarks.

©2019 MiaSolé. All rights reserved.

Specifications included in this datasheet are subject to change without notice.

MiaSolé Approved for Public Release.
302-200913-00_A